



PLANER SIDE HEAD ROTARY GRINDER

Vertical adjustment


Forward / reverse
valve

Pneumatic motor

Horizontal
adjustment

CBN jointing wheel

2 bolt mounting
plate

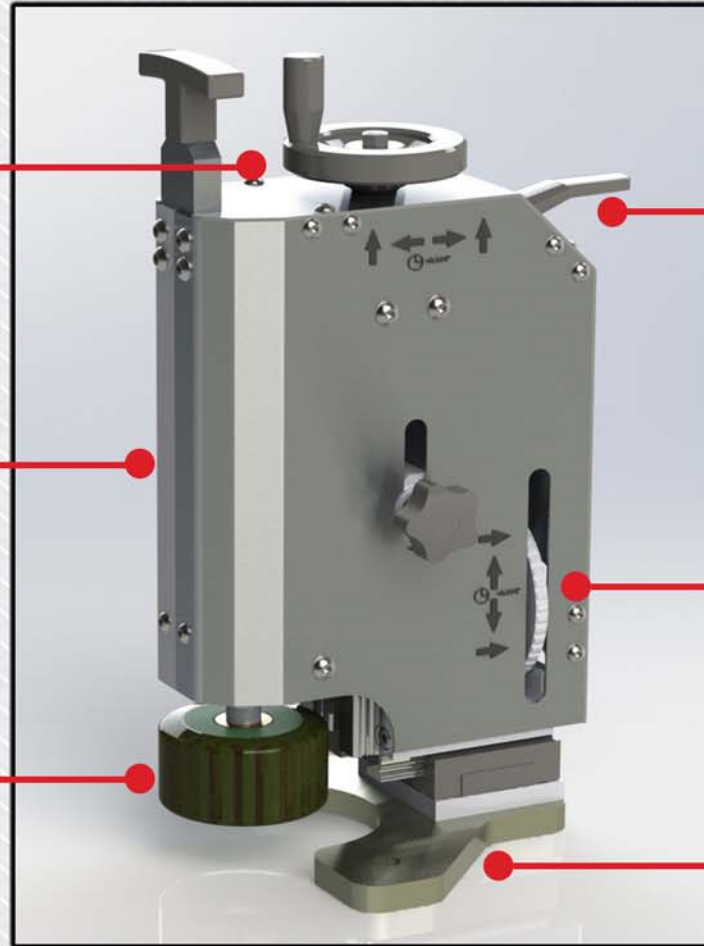

IMPROVED SAFETY-jointing occurs when machine is locked out. Safer process vs. traditional jointing because heads are not powered/spinning at 3600 rpm.

IMPROVED LUMBER QUALITY-eased edges are maintained in the jointing process, eliminating jointing damage, and minimizing chance of downgrade.

INCREASED OPERATING EFFICIENCY-knives keep perfect eased edge throughout entire part life, eliminating knives being discarded prematurely and unscheduled downtime due to blown eased edges (mid shift head swaps).

Western US

(P): (503) 403-2000
(F): (503) 691-2240

Southern US

(P): (800) 280-0033
(F): (843) 397-7787

Eastern Canada

(P): (800) 989-3739
(F): (450) 438-5757

South America

(P): +(49) 7431-549-255-10

Northern US

(P): (250) 567-2447
(F): (250) 567-2468

Western Canada

(P): (250) 567-2447
(F): (250) 567-2468



www.keyknife.com
kk@keyknife.com

Europe

(P): +43-7675-3220
(F): +43-7675-3584

South Pacific

(P): +61-2-665-18123
(F): +61-2-665-18133